


Instructions:
Select this sheet for linear panel layouts with FVNR and RVSS Starter Types.

PANEL NOTES


1. SEE SHEET DS-34 FOR LEGENDS AND TAGS.
2. GENERATOR RECEPTACLE AND POWER PANEL TO BE ON THE DRIVEWAY-SIDE OF THE ENCLOSURES.

FRAMEWORK NOTES

1. TOP AND BOTTOM OF BASE TO BE LEFT OPEN.
2. DRILL TOP OF BASE TO ATTACH ENCLOSURES AS REQUIRED.
3. DRILL BOTTOM OF BASE TO ATTACH TO SLAB AS REQUIRED.

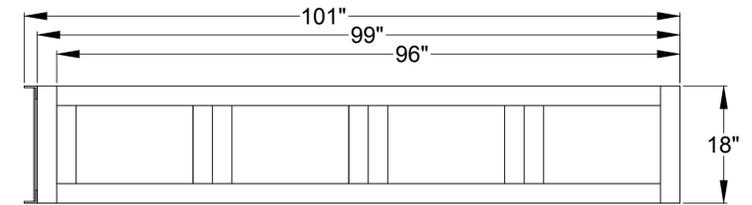


TOP VIEW

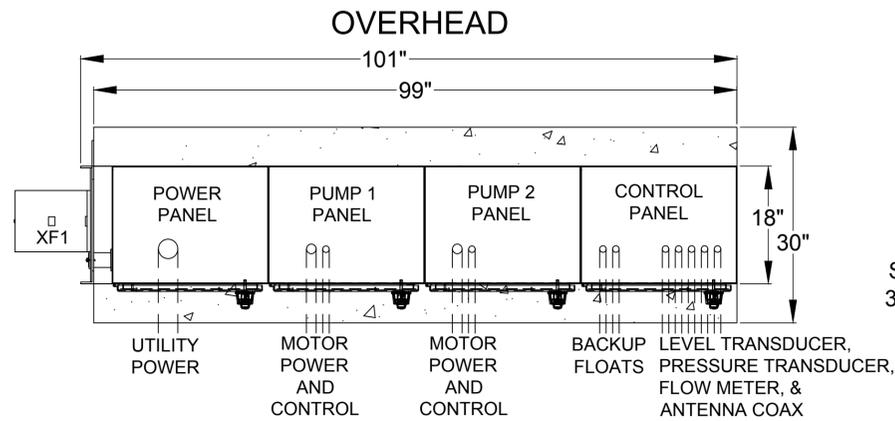

SINGLE HORIZONTAL 3" ANGLE, 3 PLC'S TO SUPPORT INTERNAL CABLES AND CONDUIT. WELD BETWEEN OTHER (3) SUPPORTS

*SEE RACK DETAILS BELOW FOR ADDITIONAL INFORMATION AND DIMENSIONS

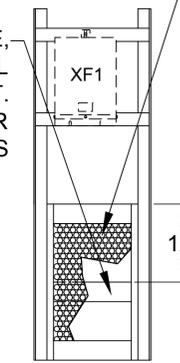


END VIEW

PERFORATED METAL, SS STAGGERED 1/4" HOLES @ 5/16" CENTERS (DIRECTMETALS.COM)


*SEE RACK DETAILS BELOW FOR ADDITIONAL INFORMATION AND DIMENSIONS

SPOT WELD AS NEEDED

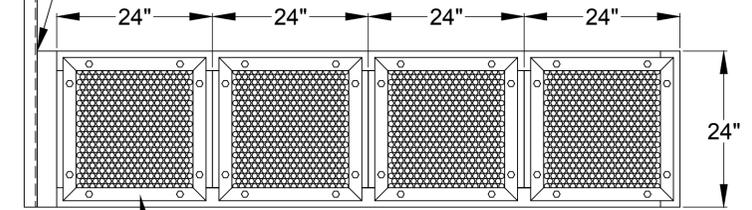

FRONT VIEW

FRONT OF BASE WILL HAVE REMOVABLE PANELS AT EACH OPENING AS SHOWN, ATTACH SCREENS TO BACK SIDE OF REMOVABLE PANELS.

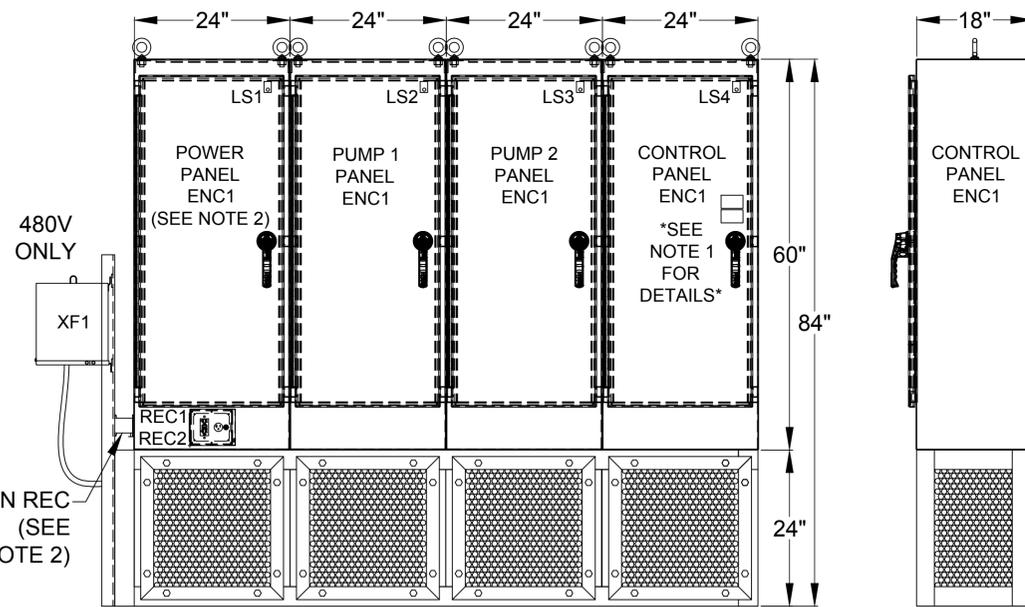

FRONT


RIGHT SIDE

LEFT SIDE


1" (MIN) CARFLEX LIQUIDTIGHT FLEXIBLE NONMETALLIC CONDUIT FOR PRIMARY AND SECONDARY TRANSFORMER CONDUCTORS

LINEAR EXTERIOR PANEL AND CONDUIT LAYOUTS

Instructions:
Include Transformer and Rack for 480V systems only, and remove for 208V/240V systems.

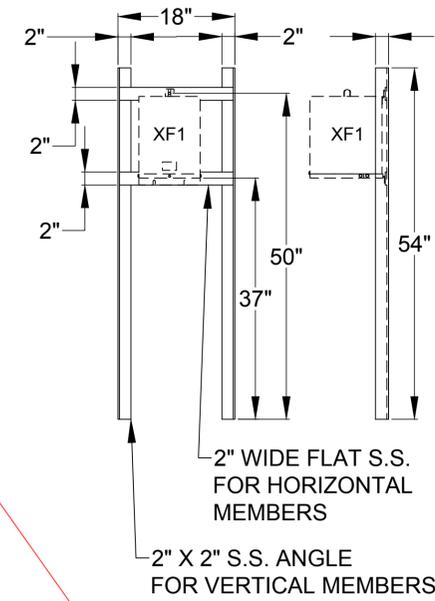


FRONT & SIDE VIEWS (480V ONLY) RACK DETAILS

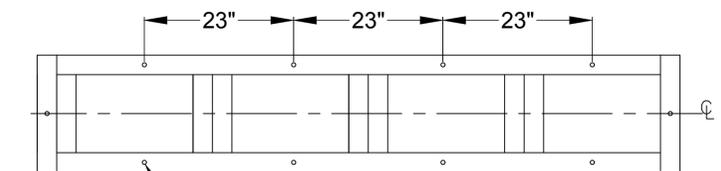

BOTTOM VIEW

DRILL (10) 5/8" DIA. HOLES AS SHOWN, CENTERED ON ANGLE

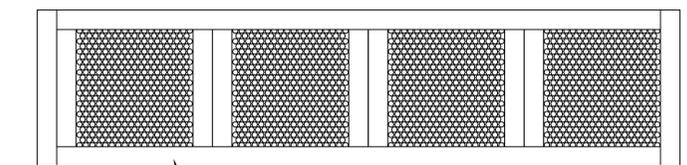

BACK VIEW

ENTIRE BASE MADE FROM 3" STAINLESS STEEL ANGLE, WELDED

BASE FRAMEWORK LAYOUT

SEE NOTE #10 ON SHEET DS-0.1